

ECCOSORB AN


FLEXIBLE FOAM SHEET BROADBAND MICROWAVE ABSORBER

Description:

Eccosorb AN is a lightweight, flexible, polyurethane foam sheet broadband microwave absorber. It is designed to reflect less than -17 dB of normal incident energy above specified frequencies and relative to a metal plate.

Features and Benefits:

- Carbon loaded, multilayer absorber
- Broadband free space absorber
- Low weight
- RoHS/Reach compliant

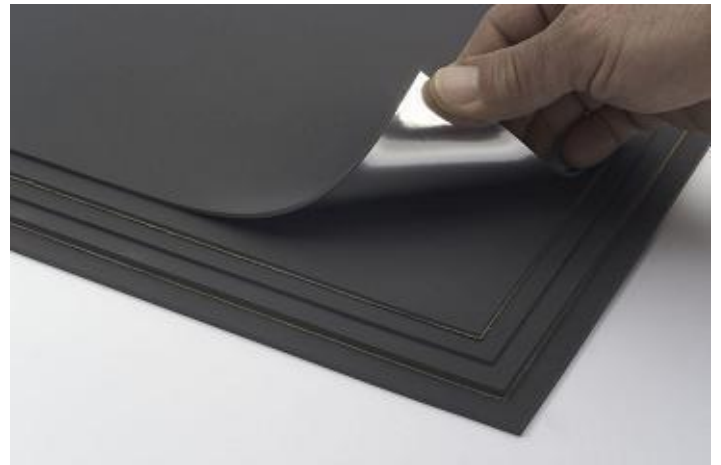

Typical Properties:

- **Front surface colour (facing oncoming EMI):** White
- **Back surface colour:** Black
- **Max. Service Temperature °C (°F):** 90 (194)
- **Power Handling (W/cm²):** 0.15
- **Fire Retardancy:** UL94-HBF

Data for design engineer guidance only. Observed performance varies in application. Engineers are reminded to test the material in application.

Applications:

- Eccosorb AN is commonly used for the lining of small test chambers to reduce reflections.
- Eccosorb AN is being used for reducing crosstalk between adjacent antennas, shrouding antennas to improve the antenna patterns and undesired back lobes, as well as selective shadowing of parts of a target for RCS measurements.
- Shadowing of posts and supports in anechoic chambers, and as absorbing blankets for testing radar systems without harm to personnel.
- For isolation of components or antennas by means of insertion loss, it can be used without a metal backing.


Availability:

- Eccosorb AN is available in six standard grades depending upon the lowest desired frequency of operation, starting from 600 MHz.
- Standard sheets are 61 cm X 61 cm (24" x 24")
- Eccosorb AN is available in other sizes and customer specified configurations, incorporating miter cuts or attachment to metal parts.
- It can be manufactured, on special order, on a mandrel, to take a contoured shape.

ECCOSORB AN

FLEXIBLE FOAM SHEET BROADBAND MICROWAVE ABSORBER

Typical Reflectivity:

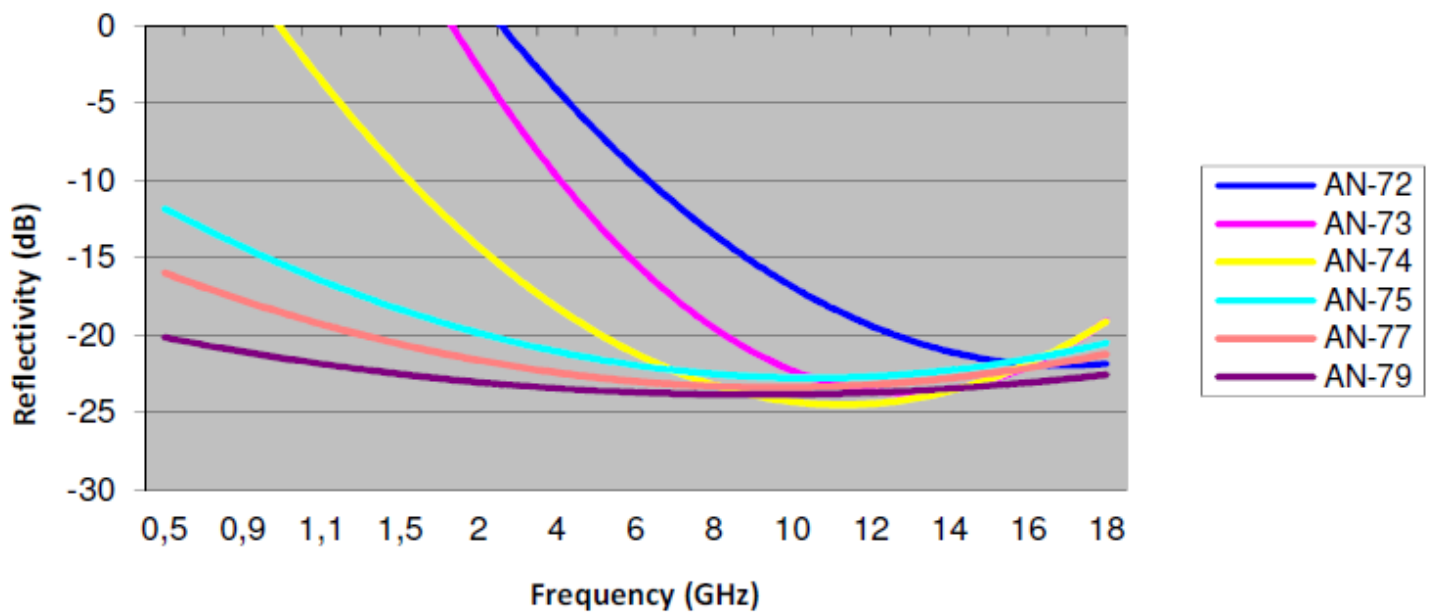

	Reflectivity Range (>17 dB)	Nominal Thickness cm (inch)	Nominal Weight kg/piece (lb/piece)
AN-72	>20 GHz	0.6 (0.24)	0.25 (0.6)
AN-73	>7.5 GHz	1.0 (0.39)	0.50 (1.1)
AN-74	>3.5 GHz	1.9 (0.75)	0.70 (1.5)
AN-75	>2.4 GHz	2.9 (1.14)	0.80 (1.8)
AN-77	>1.2 GHz	5.7 (2.24)	1.50 (3.3)
AN-79	>600 MHz	11.4 (4.49)	2.95 (6.5)

ECCOSORB AN

FLEXIBLE FOAM SHEET BROADBAND MICROWAVE ABSORBER

Environmental Properties:

- Eccosorb AN is not waterproof and will not operate correctly when wet. Since there is no washout, it will function as expected after being allowed to dry.
- A special CERSEAL coating to prevent moisture uptake in high humidity to moderately wet environments is available on special request.
- For high humidity to moderately wet environments, sealed versions of Eccosorb AN are available. They are essentially the same material as Eccosorb AN but the absorber is sealed to provide improved outdoor properties. The available types are:
 - Eccosorb AN-xx-W: sealed with neoprene coated nylon fabric, colour olive green.
 - Eccosorb AN-xx-WPC: sealed with a poly-urethane coating, different colours available on request
 - Eccosorb AN-xx-WPVC: sealed with a PVC plastic, different colours are available on request and can be provided with eyelets for fixing
- Reflectivity performance is similar to the standard Eccosorb AN product.

Instructions for Use:

- To obtain low reflectivity, the absorbers must be mounted on a metal surface. If a metal surface is not available, Eccosorb AN can be supplied metal backed with aluminium foil (ML).
- For correct operation, Eccosorb AN must have the white (front) face towards the signal to be attenuated.
- Layering of multiple pieces or slicing off part of the thickness will degrade the overall performance.
- Reflectivity performance also degrades for off-normal bistatic incidence and at different rates for different polarisations.
- Eccosorb AN can be securely bonded to itself or to other materials such as metal, wood, and common plastic composites. Our specific Eccostock® foam adhesive is recommended.